

OmniaPure *xs^{touch}* BlueLine

The specialist.

For H₂O pure type I.

When your need is for highest quality pure water that fulfils the demands of analytical and life science laboratory requirements, then one of these OmniaPure systems will be the right choice for you. The incorporated pre-treatment constantly ensures the reliability of your experimental results and reduces running costs.

Features

- OptiFill *touch* dispenser is standard
- Simple and economical filter change
- Leakage sensor is standard
- Integrated pressure reducer is standard
- Resource-saving filter volume
- Very space saving
- Ready-to-use, including filter cartridges



Dispenser on the bench,
production unit under the table



Dispenser on the wall,
production unit under the table



One hand
operation



Easy water
dispensing



Fits neatly
on the wall



Space saving
under table



Specifications	OmniaPure xs ^{touch} UV-TOC	OmniaPure xs ^{touch} UV-TOC/UF
Ultrapure water values type I		
Conductivity at 25 °C [µS/cm]	0.055	0.055
Resistance at 25 °C [MΩ x cm]	18.2	18.2
TOC-value* [ppb]	< 2	< 5
TOC monitor	yes	yes
Dispensing performance [l/min.]	up to 2	up to 2
Individually adjustable dispensing volume [liters]	0.05 up to 25	0.05 up to 25
Particles** > 0.2 µm [1/ml]	< 1	< 1
Bacteria** [CFU/ml]	< 0.01	< 0.01
Pyrogens (Endotoxins)*** [EU/ml]	–	< 0.001
RNase*** [pg/ml]	–	< 1
DNase*** [pg/ml]	–	< 5
Proteases*** [µg/ml]	–	< 0.15
*The values given are typical and may vary depending on the quality of the feed water ** With sterile filter capsule 0.2 µm or bio filter capsule *** With ultrafilter/bio filter capsule		

Feedwater requirements

Water prepared by ion exchange, reverse osmosis, electrodeionisation or distillation

Feedwater pressure [bar]	1 up to 6	1 up to 6
Conductivity at 25 °C [µS/cm]	< 100	< 100
TOC-value [ppb]	< 50	< 50

Technical data


Feedwater connection	R3/4"	R3/4"
Electrical connection [Volt/Hz]	90–240/50–60	90–240/50–60
Connected load [W]	120	120
Ambient temperature [°C]	4 up to 40 (Recommendation: 10 up to 25)	4 up to 40 (Recommendation: 10 up to 25)
Printer port	RS232	RS232
Data port	USB-A	USB-A
Dimensions* [W x H x D mm]	240 x 530 x 435	240 x 530 x 435
Weight dry [kg]*	14	14
Dimensions production unit under table [W x H x D mm]	240 x 415 x 310	240 x 415 x 310
Weight production unit dry [kg]	13	13
Dimensions OptiFill ^{touch} wall dispenser [W x H x D mm]	90 x 482 x 337	90 x 482 x 337
Weight wall dispenser [kg]	1	1
Dimensions OptiFill ^{touch} bench dispenser [W x H x D mm]	250 x 650 (750**) x 380	250 x 650 (750**) x 380
Weight bench dispenser [kg]	3	3

* With OptiFill^{touch} dispenser

Article no.	System type* Standard	Article no.	System type Production unit + wall dispenser*/**	Article no.	System type Production unit + bench dispenser*/**	Typical applications
18100004	OmniaPure xs UV-TOC	18100014	OmniaPure-W xs UV-TOC	18100024	OmniaPure-T xs UV-TOC	Ultra-trace analysis, ICP-MS, HPLC, TOC-analysis
18100005	OmniaPure xs UV-TOC/UF	18100015	OmniaPure-W xs UV-TOC/UF	18100025	OmniaPure-T xs UV-TOC/UF	Life science and microbiology, cell culture media

* Pre-treatment cartridge-, ultrapure water cartridge and sterile filter capsule 0,2 µm included

** The Omnia xs production unit can either be installed on a bench, on a wall or under the bench.

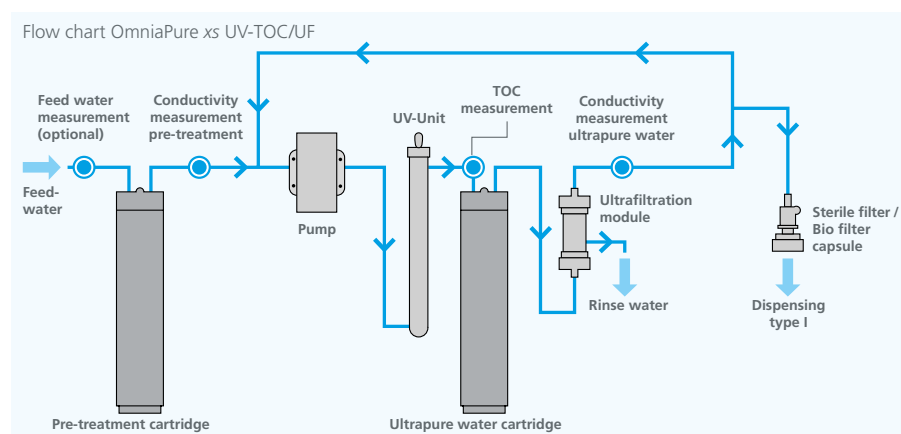

Accessories

19200305	Wall mount Omnia xs
19200090	Disinfection cartridge Omnia xs
19200057	Disinfectant Omnia – 1 pcs./pack
19200091	Disinfection kit Omnia xs (Cartridge + 1 pcs. disinfectant)
19102100	Bio filter capsule
19200092	Extension table dispenser 10 cm
19200203	Feed water measuring cell Omnia xs ^{touch}
19200062	Data printer

The Omnia Optifill^{touch} Table/Wall. Practical. Flexible. Space-saving.

Make optimum use of the valuable space in your laboratory and position the production unit under the bench. With the external dispenser and monitoring unit OptiFill^{touch} Table / Wall, you can adapt the positioning to your laboratory environment. Whether practically standing on the laboratory bench or space-saving on the laboratory wall.

Table



Wall



Separate from the production unit.

The external dispensers can be placed on the wall to save space or flexible on the laboratory bench.

